

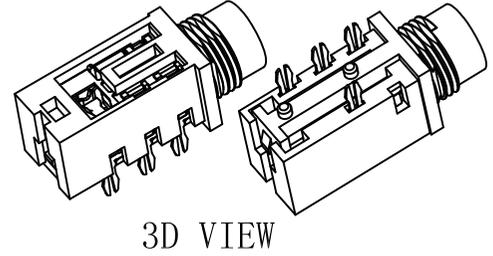
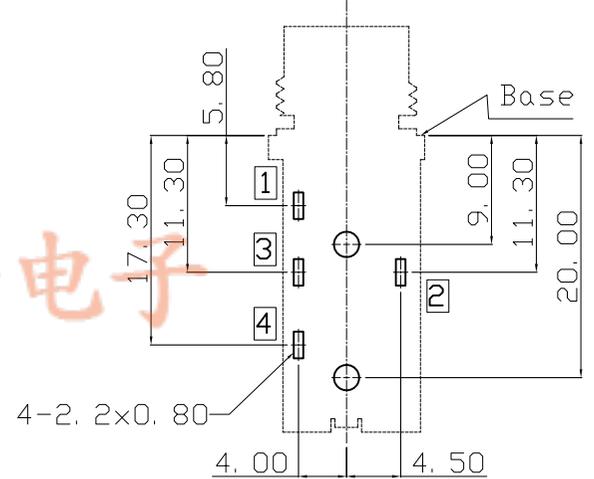
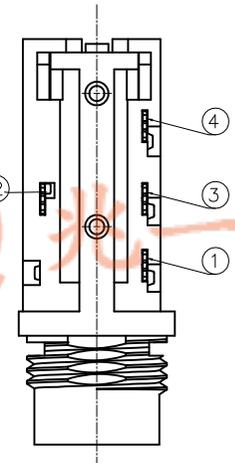
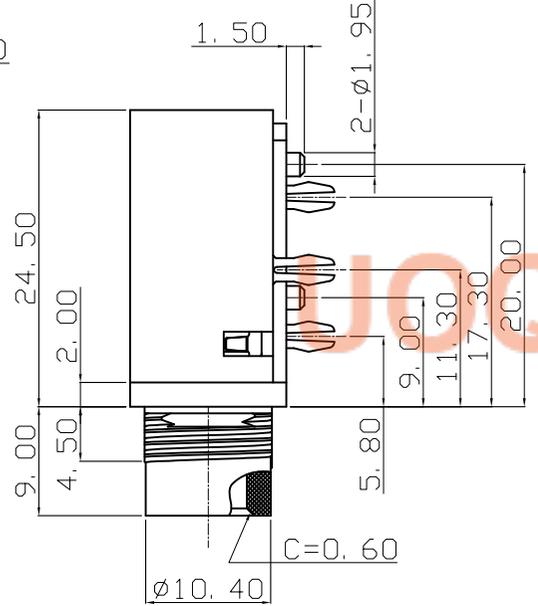




- 主要技术特性要求:
- 使用条件:
    - 环境温度: -25~50°
    - 相对湿度: 95% (40°)
  - 额定负荷: DC30V 1A
  - 接触电阻: ≤30mΩ
  - 绝缘电阻: ≥100MΩ
  - 插拔力: 15N~25N
  - 耐压: AC250V (50Hz) 1min
  - 寿命: 5000次

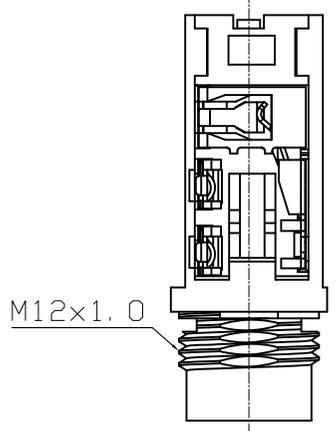

3D VIEW

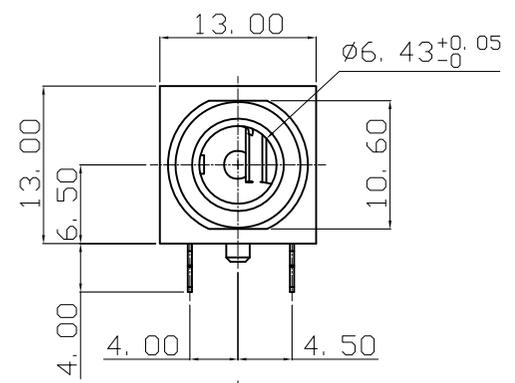

P.C. Board Dimension  
(Bottom View) PCB T=1.60MM



CONTACT SCHEMATIC DIAGRAM

|         |                  |              |            |
|---------|------------------|--------------|------------|
| ⑤       | PBT              | 黑色           |            |
| ④       | 磷铜C5191 T=0.35MM | 镀银 Ag        |            |
| ③       | 磷铜C5191 T=0.35MM | 镀银 Ag        |            |
| ②       | 磷铜C5191 T=0.35MM | 镀银 Ag        |            |
| ①       | 磷铜C5191 T=0.35MM | 镀银 Ag        |            |
| NO.(序号) | MATERIAL(材质)     | FINISH(表面处理) | REMARK(备注) |

|  |                 |                   |  |  |
|--|-----------------|-------------------|--|--|
| PRODUCT NAME (产品名称):<br>6.35 JACK CONNECTORS |                 | DRAWING BY (制图):  |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X. ±0.2<br>.X ±0.15<br>.XX ±0.1<br>ANG. ±1° |
| PRODUCT PART NO. (产品料号):                     |                 | CHECKED BY (审核):  |  |  |
| DRAWING NO. (图号):<br>ZYP-3021                |                 | APPROVED BY (核准): |  |  |
| SCALE (比例):<br>NONE                          | REV. (版本):<br>B | UNIT<br>mm        |  |  |

|                        |      |      |            |
|------------------------|------|------|------------|
| <b>UOQ 东莞市兆一电子有限公司</b> |      |      |            |
| NEW RELEASE            |      | XSH  | 2019.03.29 |
| REVISIONS              |      | CHK. | DATE       |
| NO.                    | REV. |      |            |